



## AQUBE® HY9

Fully automatic XXL hybrid system operating product fine cleaning (e.g. PCBs) as well as universal tools cleaning

Cleans all kinds of products from flux residues, resin, copper, oxide, soldering support substances, dust & grease

Capacity: e.g. up to 830 eurocards (19 m<sup>2</sup>) or 4 stencils 736 x 736 mm (29" x 29") or 28 solder frames

Part number: 0905AQ9HY51 / 0905AQ9HY61 (HT version)




### Certifications:


This system in its basic version was certified for its energy and water saving processing, for easy operability and for the standard integration of comprehensive safety features.

- Three tank system with fourfold circuit function
- Intelligent network connectivity for implementation in industry 4.0 smart factories
- Fully automatic 3step (optional up to 5step) process: Cleaning, optional: MediumWipe®, rinsing (tap water), optional: DI-water rinsing, VMH® TurboDigital evaporative drying
- PTFE mounted surround (vertical & horizontal rotors) rotor system with four asynchronous spray rotors
- Vertical and horizontal stencil cleaning possible
- Water free operation possible with a suitable cleaning / rinsing detergent
- Process and service intervals PLC controlled, event issuing and software control via touch screen
- EDGELESS design and VARAccess® maintenance access: maximum capacity on a very small footprint
- HT version for high temperature cleaning and rinsing up to 80 °C available


### Key applications

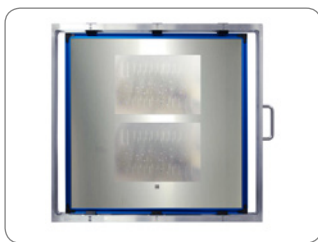


Screens, Stencils

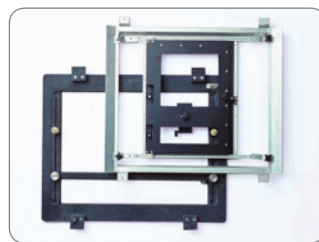

Solder carriers



ESD boxes, magazines

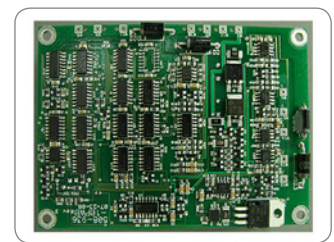

Assembled PCBs

The new kolb AQUBE® series offer next-generation cleaning systems - even more efficient, even more compact, easy to handle and maintain, pre-equipped for extended water management and cyber-physically ready for the smart factory (SF ready).

AQUBE® HY9 is a high end large scale hybrid system. Due to its three-tank, four-circuit configuration the system can operate two different processes with two different detergents in fully separate cycles: Product fine cleaning of e.g. PCBs, hybrids or misprints as well as universal tools cleaning (screens / stencils, solder frames, carriers magazines, filter steel sheets, etc.).

The fully automatic cleaner with by far the largest process chamber of a hybrid batch system worldwide offers short cycle times and is the perfect economic choice for varying cleaning tasks.

**The cleaning system can be operated with all common electronics cleaning supplies (detergents / chemistry, etc.) which are approved by the manufacturer.**








## AQUBE® HY9

Fully automatic XXL hybrid system operating product fine cleaning (e.g. PCBs) as well as universal tools cleaning

Part number: 0905AQ9HY51 / 0905AQ9HY61 (HT version)



### Application overview

Optional suitable	Most suitable	Most suitable	Most suitable	Optional suitable
				
Assembled PCBs Hybrids Misprints	Stencils Screens, PumpPrints Misprints	Solder frames Solder carriers Solder masks	ESD Boxes Containers Magazines	Condensation traps Filters Steel sheets

Optional suitable applications can also be optimally realized with the appropriate options.

**Cleaning** (key process 1): From one of the cleaning tanks (A, B) the cleaner liquid is sucked by a magnetically coupled pump unit and routed with a controllable volume flow through a separate circuit into the PTFE mounted ASYNCHRO® stainless steel spray rotors with patented PUSHFORCE® nozzles. Their geometry ensures a comprehensive and thorough cleaning, even in inaccessible and critical areas. After the washing procedure, the valve switchover of the process chamber undocks the cleaning circuit until the next process run.

**MediumWipe®** (optional intermediate process): The remaining cleaner is blown off from the clean products and blown out of the cleaner circuit and recirculated into the cleaning tank before the valve switchover closes.

**Rinsing with tap water** (key process 2): From the rinsing tank (tank C), the water is pumped through the separate second circuit into the spray rotors. Tap water has (compared to DI / DM water) the advantage of lower surface tension and thus flushes also critical points as low standoffs more efficient.

**MediumWipe®** (optional intermediate process): The remaining water is blown off from the products and blown out of the cleaner circuit and recirculated into the rinsing tank.

**Clear rinsing with DI / DM water** (optional process): The DI / DM water is produced from tap water in an integrated MB-cartridge and flushes conducting ions of the previous processes. This process is repeated automatically until the remaining amount of ions falls below the programmed value.

**MediumWipe®** (optional intermediate process): Blowing off and recirculating the remaining DI / DM water into the rinsing tank.

**Drying** (key process 4): The clean products are dried with the patented VMH® (Venturi Mixed Hot air) technology. A high volume flow of normal circulating air is blown into a venturi nozzle. The resulting differential pressure there (passively) sucks on a small amount of very high temperature air. The resulting air mixture provides for uniformly high drying temperature (adjustable between 45 and 120 °C) all over the process chamber. Further advantages are robustness and low cost of ownership. Energy is only needed for a fan and the heating of a very small amount of air; the rest is executed by pressure differences and air duct geometry.

**Maintenance:** The system has a VARAccess® maintenance access system with recessed, variable doors and removable panels. In the maintenance area among others are the pump-out set, the optional re-dosage unit with space for a 25 liter detergent and a 5 l additive container as well as the MB cartridge for DI / DM water processing. Tank levels as well as pressure values and maintenance cycles are monitored by the PLC and displayed on the touch screen.



## AQUBE® HY9


Fully automatic XXL hybrid system operating product fine cleaning (e.g. PCBs) as well as universal tools cleaning

Part number: 0905AQ9HY51 / 0905AQ9HY61 (HT version)



### Main standard features

- PowerSpray® technology bundle: magnetically coupled pump unit, twofold ASYNCHRO® volume-spray rotorsystem with low maintenance PTFE mounted stainless steel rotors with PUSHFORCE® nozzles, "Option101" softwareprogram (101 freely selectable programs)
- PolyPower® XL configuration with XL-Power pump unit
- EATON Programmable Logic Controller (PLC) with module extension for special programming and technology extensions
- Smart Factory ready: DNAccess® (standard) for remote control (see options) and traceability with retractable touch monitor and integrated industrial PC (see options)
- High resolution 10" (1.280 x 800 px) display with capacitive multi-touch and intuitive process view
- Electrically driven large double-wall airlock door: transparent or process-related with internal pane made of stainless steel
- Fourfold alternating LED status light bar integrated in the system frame
- Washing cart
- Full flow coarse filter (process chamber)
- Sediment filter tank A
- Fine filter tank A, B, C
- VMH® TurboDigital hot air evaporative drying (control range approx. 45 - 120 °C)
- ClosedLoop reprocessing of cleaning and rinsing fluids
- HMA software and pre-equipping for HMA hardware (Heavy Metal Adsorber) for the cleaning circuit (see options)
- Spare space for MB- / DI-cartridge for deionized (DI) and demineralized (DM) water
- Exchange for rinse water and pump out unit
- Safety features: safety interlock on the process chamber door, overflow alarm for all tank sections, overheating protection for all heating and drying elements, end switches for all motor-driven valves and drives, personnel protection insulation
- VARlccess® service access with right and left-hinged side doors as well as unhinging possibility for side doors, front panel, and rear supply rail
- EDGELESS housing design. Doors, cover panels and hinges without edges, depot for traceability scanner and monitor in the right side panel
- Process sections made of electrolysis resistant elements



## AQUBE® HY9

Fully automatic XXL hybrid system operating product fine cleaning (e.g. PCBs) as well as universal tools cleaning

Part number: 0905AQ9HY51 / 0905AQ9HY61 (HT version)



### Main options

- Adjustable DI / DM water mixing and blending unit
- AOSelection® bundle to separate mandatory disposable and public sewage network dischargeable rinse water
- Automatic monitoring of ionic residues contamination and gauging of rinse water quality
- Automatic re-dosage unit for 25 l detergent and 5 l additive container
- Automatic water change for cleaning circuit (only HT version)
- Descaling unit to reduce the lime content in the rinsing water
- Drip & storage reservoir
- Exhaust unit
- Heater for tank A, B, C
- HMA filter (Heavy Metal Adsorber) unit for the cleaning circuit
- HT version for high temperature cleaning up to 80 °C
- MB / DI cartridge for deionized (DI) and demineralized (DM) water
- MediumWipe® unit for further optimization of detergent and rinsing fluid use
- Optional lacquering (frame rack and coverings)
- Permanent automatic rotor run control
- Remote Control (remote monitoring, mailing, etc.)
- Sediment filter (tank B, C)
- Status light fivefold to display the current process state
- Traceability unit with PLC data scanner and retractable touch monitor and industrial PC with Intel processor
- VA drawer baskets with PTFE mounted ASYNCHRO® stainless steel TopDown double rotors with PUSHFORCE® special nozzles



# AQUBE® HY9


Fully automatic XXL hybrid system operating product fine cleaning (e.g. PCBs) as well as universal tools cleaning

Part number: 0905AQ9HY51 / 0905AQ9HY61 (HT version)



### Internal rinse water processing (standard)

### Options for water management

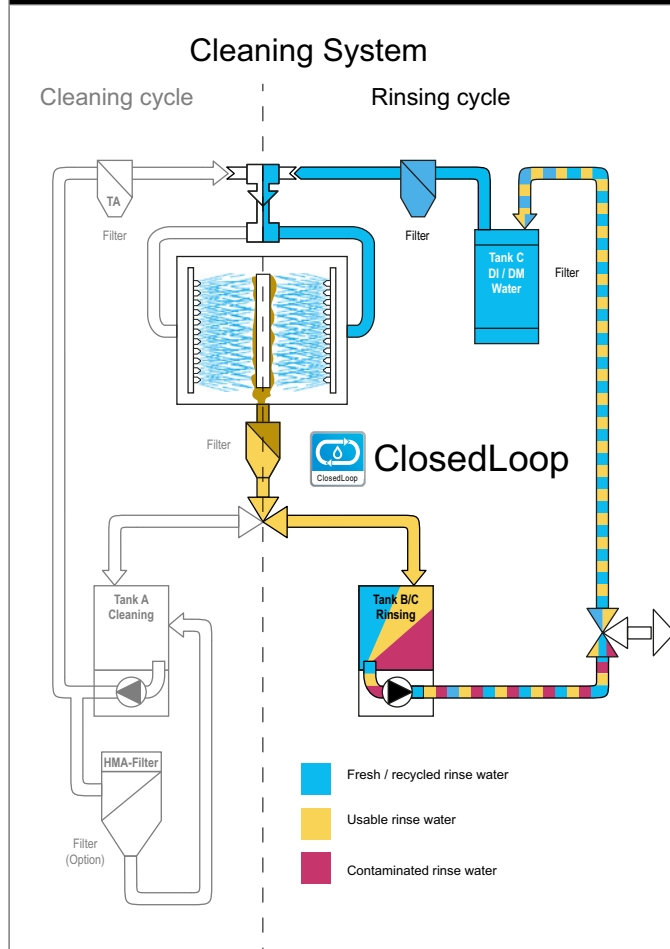

#### AOSelection® unit

separates mandatory disposable from public sewage network inroducable rinse water.

#### WPSD IU SYMBIO-module

Processes mandatory disposable sewage water to public sewage network inroducable rinse water.

#### WPSD 200 system

Processes mandatory disposable sewage water from up to three cleaning systems to public sewage network inroducable rinse water.

#### WPSD 500 system


Processes mandatory disposable sewage water from up to five cleaning systems to public sewage network inroducable rinse water.

#### WPCL IUT2 SYMBIO-module

Recycles DI / DM water for recirculation and multiple reuse in the cleaning system clear rinsing cycle.

#### WPCL 330 system

Recycles DI / DM water for recirculation and multiple reuse in the cleaning system clear rinsing cycle.



# AQUBE® HY9

Fully automatic XXL hybrid system operating product fine cleaning (e.g. PCBs) as well as universal tools cleaning


Part number: 0905AQ9HY51 / 0905AQ9HY61 (HT version)




## Technical data

Technology base	<b>kolb PowerSpray®</b>
Capacity	830 eurocards (19 m <sup>2</sup> ) or 4 stencils 736 x 736 mm (29" x 29") or 28 solder frames
Process chamber dimensions	W 970 • D 955 • H 900 mm
Usable space	W 850 • D 955 • H 780 mm
Volume tanks A, B (cleaning), C (rinsing)	each approx. 100 - 125 l
Power supply	400 V AC, 32 A CEE / 3PH / 50 or 60 HZ
Power consumption	approx. 7.5 kW
Control system	PLC (EATON)
Temperature load	up to 55 °C (standard system), up to 80 °C (HT-version)
Control range drying	approx. 45 - 120 °C
Filter system	up to four stage - 1. Full flow coarse filter < 2 mm, 2. Sediment filter inside the tank, 3. 20" fine filter (1 - 100µm - process dependent), 4. HMA filter
Supply connection 1 (tap water)	3/8", hose connection 14 mm (prov. by customer: inlet water quality < 350 µS conductance value (< 10° dH) or option descaling unit)
Supply connection 2 (DI / DM water)	1/4", hose connection 14 mm (DI-net prov. by customer or bridging to tap water)
Supply connection 3 (compressed air)	6 - 8 bar (100 l / min) for HT-version or optional MediumWipe® process
Rinse water drain connection	3/4", hose connection 25 mm with integrated pump out system
Exhaust connection	Ø 160 mm, exhaust capacity 200 to 300m <sup>3</sup> / h
Footprint	1.700 x 1.720 mm
Operating noise	63 dB (A)
Empty weight	960 kg

**Top view:**  
Space requirement cleaning system  
(a) = Exhaust 160 mm  
(b) = Status light

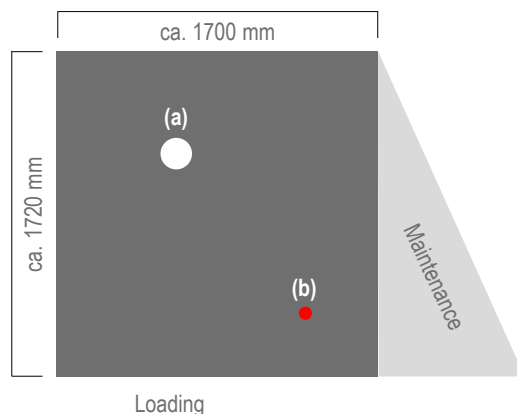

**Front view:**  
with optional status light (b)


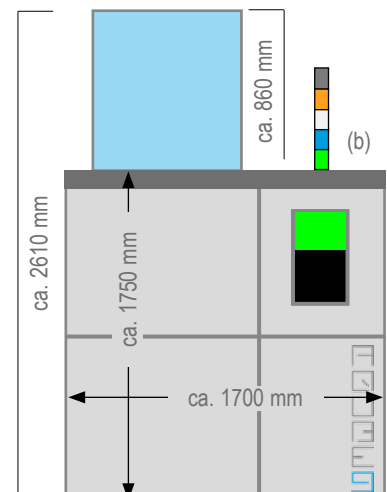




## kolb CleaninGrid® Technology

AQUBE® HY9 systems are suitable for use in a kolb CleaninGrid® plant. The kolb CleaninGrid® technology is an intelligent combination and integration of cleaning, loading, water treatment and control systems to large-scale facilities for the efficient mass cleaning of assemblies, tools and machine parts. The CleaninGrid® technology is completely flexible, constructively easy to execute and based on three connection availabilities:

- Machine (A) to machine (A)
- Machine to loading / unloading automat (B)
- Machine to water processing system (C)

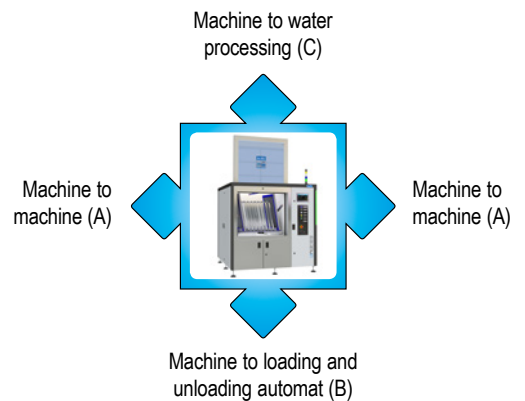


Example configuration:  
Two AQUBE® HY9 systems,  
two loading and unloading  
units.  
Capacity:  
Appr. 25.000 eurocards or  
128 stencils or 900 solder fra-  
mes in a 24 hour shift



### Large installations and comprehensive washing plants

From just connecting two systems together to fulfill moderately growing volume requirements to building a complete washing center for quantities of multi-thousands of boards per day und evaporator water processing, the mutable kolb CleaninGrid® technology leaves all options.



Example configuration:  
AQUBE® HY9 system with  
loading and unloading unit and  
kolb vacuumdistiller for 100%  
recycling of rinse water.  
Capacity:  
830 eurocards or 4 stencils or  
28 solder carriers in one cycle



### The main advantages of the kolb CleaninGrid® technology:

- Much higher throughput than any conventional inline installation (a single AQUBE® HY9 batch system already exceeds the capacity of one average inline system).
- Shorter cycle times per board than any PCB cleaning system on the market.
- Extremely lower power consumption compared to any system or installation on the market with a comparable capacity.
- Significantly lower operating costs compared to any conventional inline system with a comparable capacity.
- The complete installation out of one hand.