


AOI BUFFER STACKER

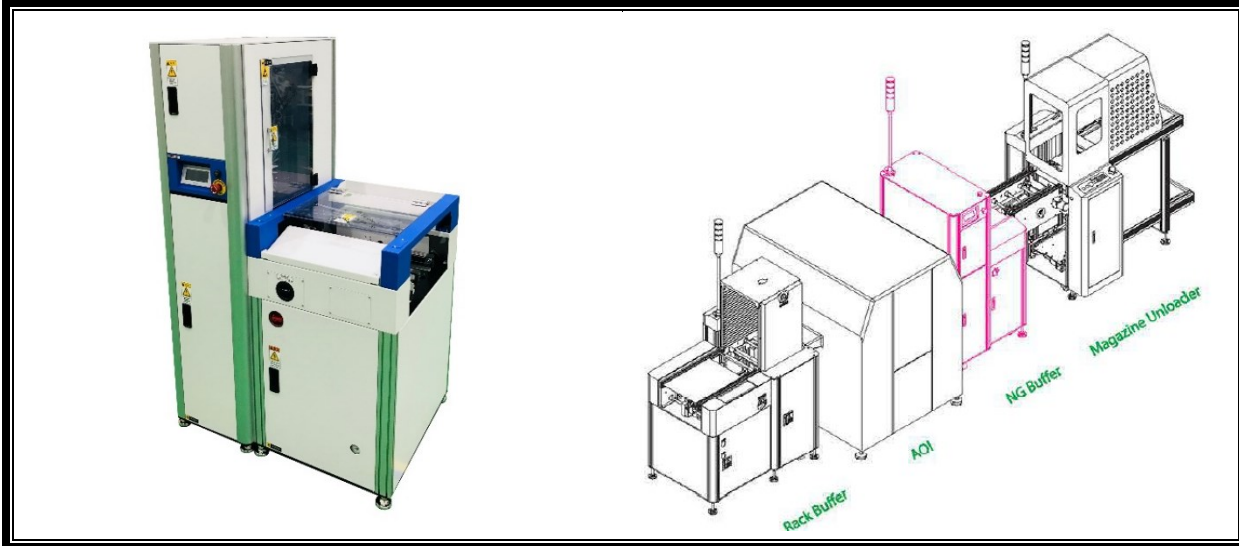


FEATURES

- SMEMA Interface
- Conveyor and rack separately driven system
- Rack driven by gear
- 10 slots (45mm pitch)
- RS-232C interface using SPI review PC
- FIFO / LIFO / NG / PASS mode
- Adjustable stacking quantity of NG or GOOD PCB (NG + GOOD = 10)
- Buzzer
- 3 color LED light tower
- Touchscreen
- Rack + conveyor structure
- 3mm edge clearance at conveyor
- Clearance (upper – 25mm / lower – 25mm) at conveyor

OPTIONS

- Conveyor automatic width adjustment
- Conveyor speed control
- 2nd floor conveyor
- 20 slots (22mm pitch)
- Keyboard, mouse, and monitor stand
- Pneumatic stopper
- High speed lift
- CE
- RS-485 communication

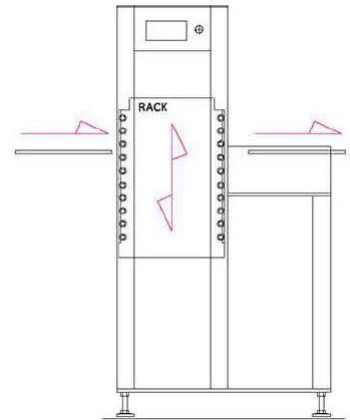

SPECIFICATIONS

Model	Type	Max. PCB (L x W) mm	Min. PCB (L x W) mm	Dimension (L x W x H)	Power	Air (MPa)	Weight (Kg)
ANB-15S	S	330 x 250	60 x 60	980 x 890 x 1505	0.3kVA	0.5 ± 0.1	240
ANB-15Y	Y	440 x 330		1090 x 970 x 1505			260
ANB-15L	L	530 x 375		1180 x 1015 x 1505			280
ANB-15X	XL	530 x 460		1180 x 1100 x 1505	290		
ANB-152X	2XL	610 x 460		1260 x 1100 x 1505	0.4kVA		300

Custom options available by request