


BUFFER STACKER (RACK TYPE)

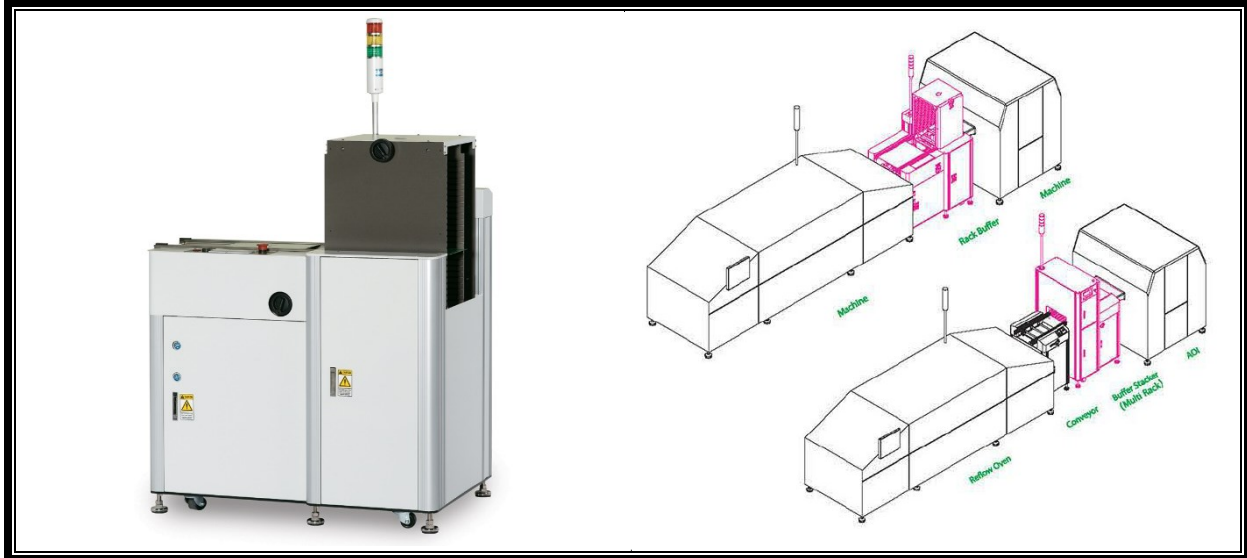


FEATURES

- SMEMA Interface
- 25 slots
- FIFO / LIFO
- PCB damage prevention sensor
- Touchscreen
- Pneumatic pusher cylinder
- Conveyor plus rack structure
- 3 colored LED light tower
- Buzzer
- 3mm edge clearance at conveyor
- Clearance (upper – 25mm / lower – 25mm) at conveyor

OPTIONS

- Auxiliary buffer conveyor
- Cooling fan at conveyor
- ESD cover at conveyor
- Automatic width adjustment
- Conveyor speed control
- 50 slots
- High speed lift
- Pneumatic stopper
- CE
- RS-485 communication
- NG function

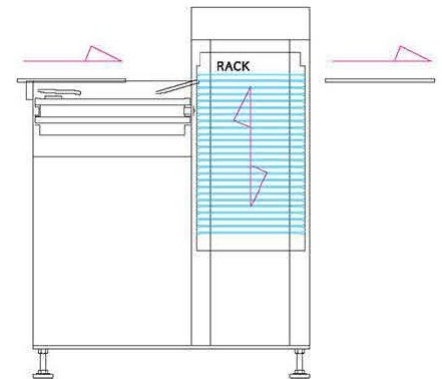

SPECIFICATIONS

Model	Type	PCB Capacity	Max. PCB (L x W) mm	Min. PCB (L x W) mm	Dimension (L x W x H)	Power	Air (MPa)	Weight (Kg)
ARB-25S	S	25 – 50 Standard : 25	330 x 250	100 x 80	855 x 640 x 1130	0.3kVA	0.5 ± 0.1	210
ARB-25Y	Y		440 x 330		1080 x 720 x 1130			230
ARB-25L	L		530 x 375		1260 x 765 x 1130			250
ARB-25X	XL		530 x 460		1260 x 850 x 1130			260
ARB-252X	2XL		610 x 460		1420 x 850 x 1130			270

Custom options available by request