


# DESTACKER

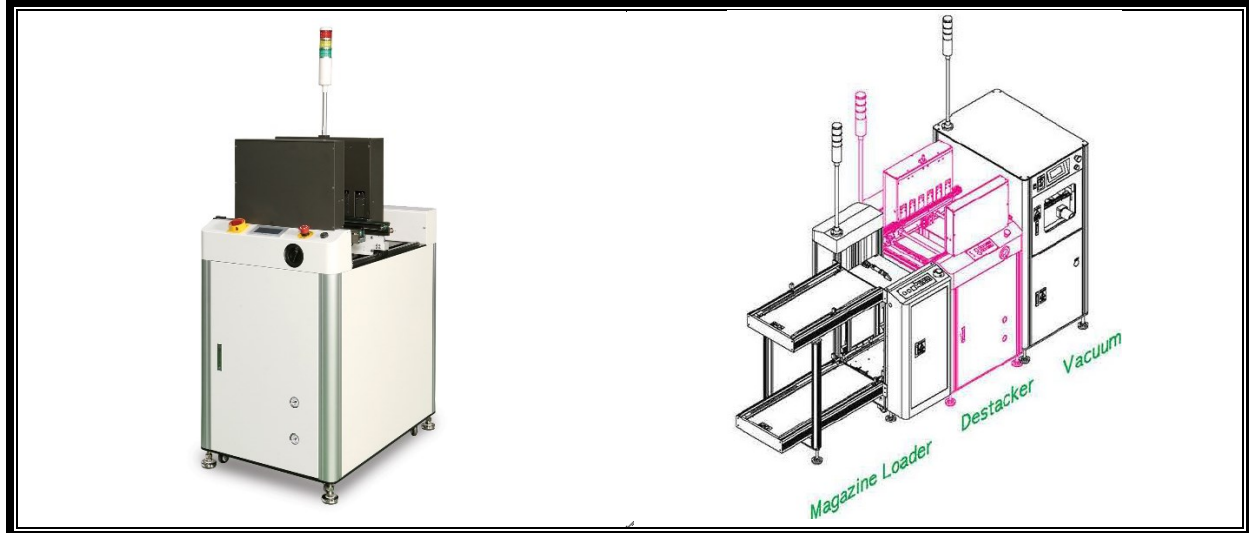


## FEATURES

- SMEMA Interface
- For bare board and small PCB
- Pneumatic release of stacked boards one by one
- Adjustable board thickness setting
- Pass mode
- Touchscreen
- Stacking height – 180 mm (accommodating 90 PCBs with 2mm thickness)
- 3mm edge clearance at conveyor
- Clearance (upper – 25mm / lower – 25mm) at conveyor with pass mode

## OPTIONS

- Conveyor automatic width adjustment
- Conveyor speed control
- 3 color LED light tower
- CE
- RS-485 communication

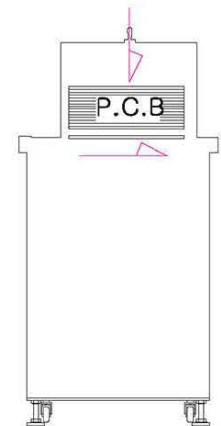

## SPECIFICATIONS

| Model    | Type | Max. PCB (L x W) mm | Min. PCB (L x W) mm | Dimension (L x W x H) | Power  | Air (MPa) | Weight (Kg) |
|----------|------|---------------------|---------------------|-----------------------|--------|-----------|-------------|
| ADS-50S  | S    | 330 x 250           | 70 x 60             | 550 x 710 x 1215      | 0.3kVA | 0/5 ± 0.1 | 190         |
| ADS-50Y  | Y    | 440 x 330           |                     | 550 x 790 x 1215      |        |           | 210         |
| ADS-50L  | L    | 530 x 375           |                     | 650 x 835 x 1215      |        |           | 220         |
| ADS-50X  | XL   | 530 x 460           |                     | 650 x 920 x 1215      |        |           | 230         |
| ADS-502X | 2XL  | 610 x 460           |                     | 750 x 920 x 1215      |        |           | 260         |

*Custom options available by request*