


GATE CONVEYOR


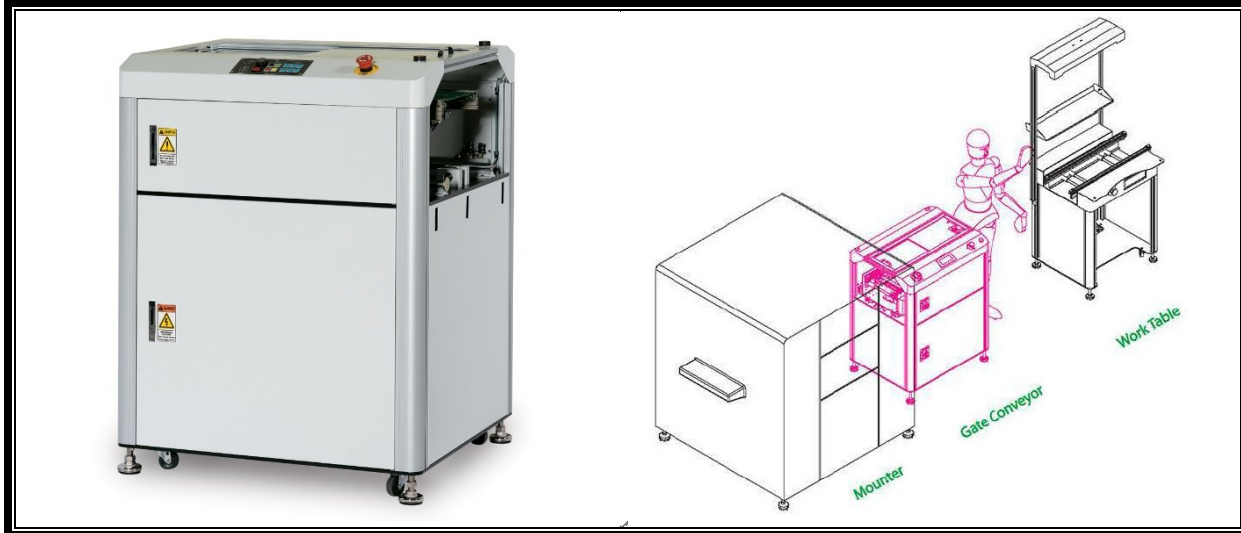


FEATURES

- SMEMA Interface
- Durable structure with double base plate
- Buzzer
- Body: 810mm; Gateway: 600mm
- Sliding with stepper motor
- Touchscreen
- 3mm edge clearance at conveyor
- Clearance (upper – 25mm / lower – 25mm) at conveyor

OPTIONS

- Normally closed type
- Conveyor automatic width adjustment
- Conveyor speed control
- ESD cover at gateway
- Front door
- Safety light curtain (3 sets)
- Selectable rail length at body and gateway
- 3 color LED light tower
- Dual lane
- CE
- RS-485 communication

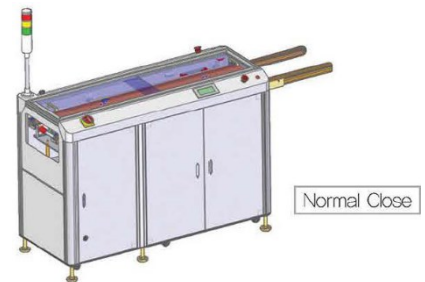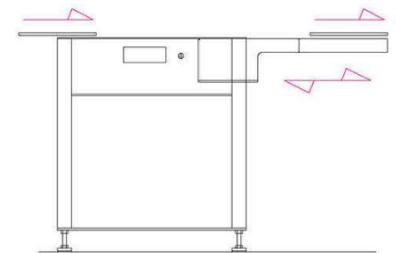

SPECIFICATIONS

Model	Type	Max. PCB (L x W) mm	Min. PCB (L x W) mm	Dimension (L x W x H)	Power	Weight (Kg)
AG1-80S	S	330 x 250	50 x 50	1410 (810+600) x 620 x 1000	0.3kVA	150
AG1-80Y	Y	440 x 330		1410 (810+600) x 700 x 1000		160
AG1-80L	L	530 x 375		1410 (810+600) x 745 x 1000		170
AG1-80X	XL	530 x 460		1410 (810+600) x 830 x 1000		200
AG1-802X	2XL	610 x 460		1410 (810+600) x 830 x 1000		200

Custom options available by request