


HORIZONTAL TURNING CONVEYOR

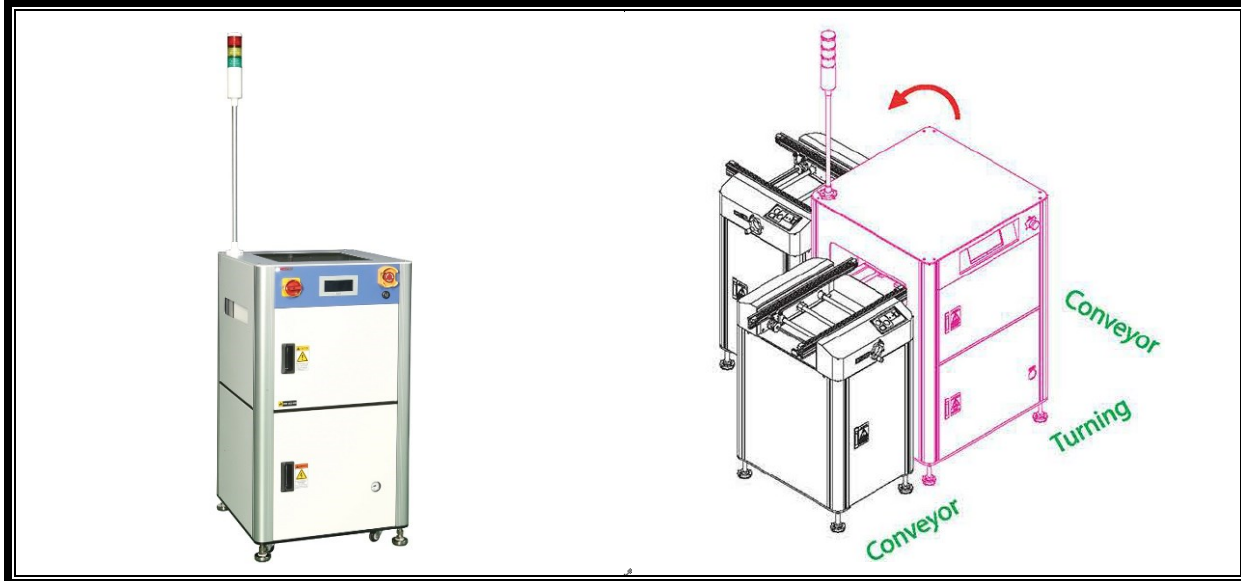


FEATURES

- SMEMA interface
- Durable structure with double base plate
- Touchscreen
- Buzzer
- 3 colored LED light tower
- Shock absorber for PCB holding
- Turning system by pneumatic cylinder
- Safety full cover
- 1-IN/1-OUT, 1-IN/2-OUT, 2-IN/1-OUT And 2-IN/2-OUT
- 3mm edge clearance at conveyor
- Clearance (upper – 25mm / lower – 25mm) at conveyor

OPTIONS

- Conveyor automatic width adjustment
- Conveyor speed control
- Auxiliary buffer conveyor
- CE
- RS-485 communication

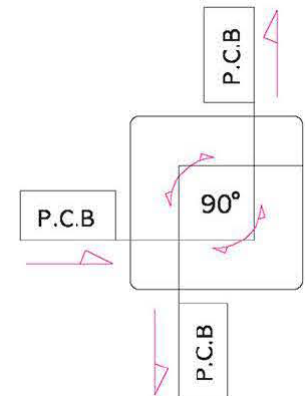

SPECIFICATIONS

Model	Type	Max. PCB (L x W) mm	Min. PCB (L x W) mm	Dimension (L x W x H)	Power	Air (MPa)	Weight (Kg)
AHT-50S	S	330 x 250	50 x 50	610 x 600 x 1105	0.3kVA	0.5±0.1	170
AHT-50Y	Y	440 x 330		710 x 700 x 1105			180
AHT-50L	L	530 x 375		810 x 800 x 1105			190
AHT-50X	XL	530 x 460		810 x 800 x 1105			190
AHT-502X	2XL	610 x 460		910 x 900 x 1105			200

Custom options available by request