


# LINK CONVEYOR

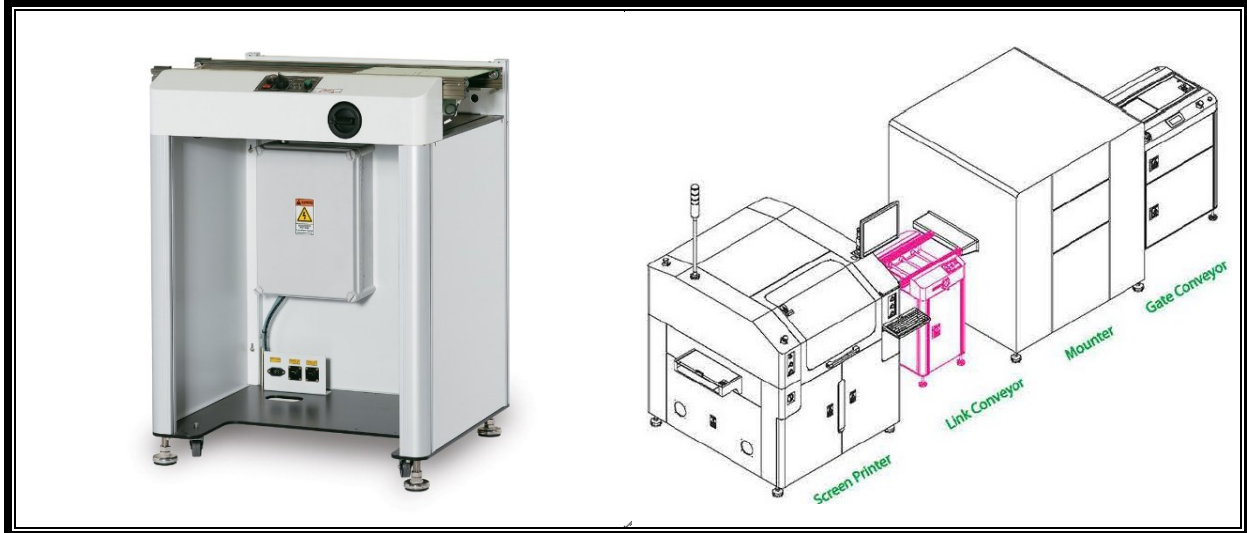

## FEATURES

- SMEMA Interface
- Work and pass mode
- Durable structure with double base plate
- Button operation
- Buzzer
- 3mm edge clearance at conveyor
- Clearance (upper – 25mm / lower – 25mm) at conveyor

## OPTIONS

- Conveyor automatic width adjustment
- ESD cover at conveyor
- Cooling fan at conveyor
- Touchscreen
- Conveyor speed control
- Front door
- Pneumatic stopper
- Selectable rail length
- Multi-zone segment
- Selectable belt type (ESD, heat resistant, chain, etc.)
- 3 color LED light tower
- Dual lane
- CE



## SPECIFICATIONS

Model	Type	Max. PCB (L x W) mm	Min. PCB (L x W) mm	Dimension (L x W x H)	Power	Weight (Kg)
ACC-60S	S	330 x 250	50 x 50	600 x 600 x 910	0.1kVA	80
ACC-60Y	Y	440 x 330		600 x 680 x 910		90
ACC-60L	L	530 x 375		600 x 725 x 910		100
ACC-60X	XL	530 x 460		600 x 810 x 910		110
ACC-602X	2XL	610 x 460		800 x 810 x 910		130
★ 60S : 600mm ★ 80S : 800mm						

Custom options available by request