

MAGAZINE LOADER (CE)




FEATURES

- SMEMA Interface
- Top & Bottom pneumatic clamps to secure magazine rack
- 3-color LED light tower
- Buzzer
- Pneumatic pusher
- Set up pitch (1~4)
- Touchscreen
- Magazine-in from lower; Magazine out to upper
- PCB out from top to bottom
- 3 rack magazine capacity (Upper - 1 / Lower - 2)
- Safety full cover (lift and magazine conveyor)

OPTIONS

- 2 different magazine sizes
- Space saver (Type T)
- High speed magazine exchange (23 sec.)
- Auxiliary buffer conveyor
- 5 rack magazine capacity (Upper - 2 / Lower - 3)
- PCB damage prevention sensor
- Automatic width adjustment at exit guide
- Automatic width adjustment at pusher
- Dual lane
- RS-485 communication

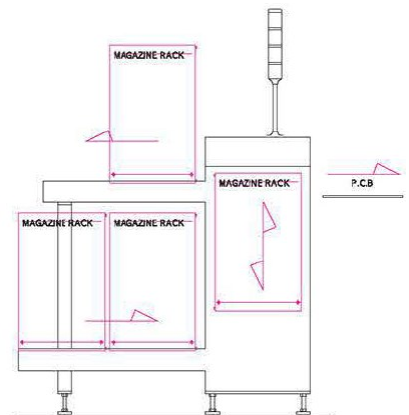

SPECIFICATIONS

Model	Type	Rack	Max. PCB (L x W) mm	Min. PCB (L x W) mm	Dimension (L x W x H)	Power	Air (MPa)	Weight (Kg)
ALD-12CE	S	3	330 x 250	100 x 80	1170 x 810 x 1670	0.3 kVA	0.5 ± 0.1	180
	Y		440 x 330		1480 x 922 x 1670			200
	L		530 x 375		1760 x 985 x 1670			220
	XL		530 x 460		1770 x 1095 x 1670	240		
	2XL		610 x 460		1850 x 1095 x 1670	250		
						0.4kVA		

Custom options available by request