


MAGAZINE LOADER

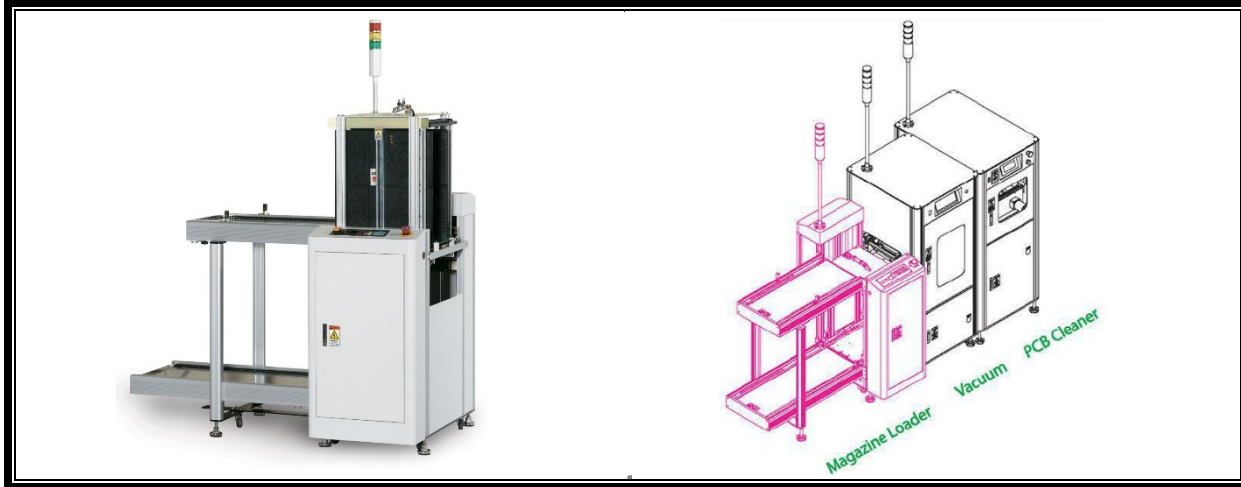


FEATURES

- SMEMA Interface
- Top & Bottom pneumatic clamps to secure magazine rack
- 3-color LED light tower
- Buzzer
- Pneumatic pusher
- Set up pitch (1~4)
- Touchscreen
- Magazine-in from lower; Magazine out to upper
- PCB out from top to bottom
- 3 rack magazine capacity (Upper - 1 / Lower - 2)

OPTIONS

- Two (2) different magazine sizes
- Space saver (Type T)
- High speed magazine exchange (23 sec.)
- Auxiliary buffer conveyor
- Five (5) rack magazine capacity (Upper - 2 / Lower - 3)
- PCB damage prevention sensor
- Automatic width adjustment at exit guide
- Automatic width adjustment at pusher
- Safety full cover (lift and magazine conveyor)
- Dual lane
- RS-485 communication

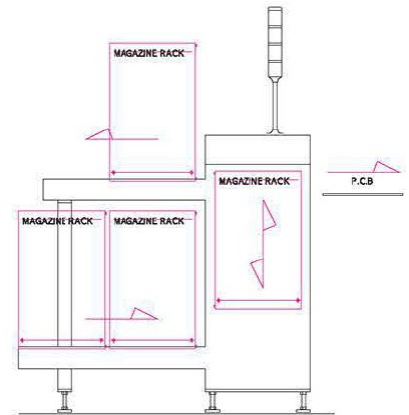

SPECIFICATIONS

Model	Type	Rack	Max. PCB (L x W) mm	Min. PCB (L x W) mm	Dimension (L x W x H)	Power	Air (MPa)	Weight (Kg)
ALD-12S	S	3	330 x 250	100 x 80	1170 x 810 x 1130	0.3 kVA	0.5 ± 0.1	160
ALD-23S		5			1525 x 810 x 1130			180
ALD-12Y	Y	3	440 x 330		1480 x 925 x 1130			180
ALD-23Y		5			1940 x 925 x 1130			200
ALD-12L	L	3	530 x 375		1780 x 985 x 1130			0.4kVA
ALD-23L		5			2305 x 985 x 1130	220		
ALD-12X	XL	3	530 x 460		1770 x 1095 x 1130	0.4kVA		230
ALD-122X	2XL	3	610 x 460		1855 x 1095 x 1130			240

Custom options available by request