


MAGAZINE UNLOADER (ERGONOMIC) TYPE

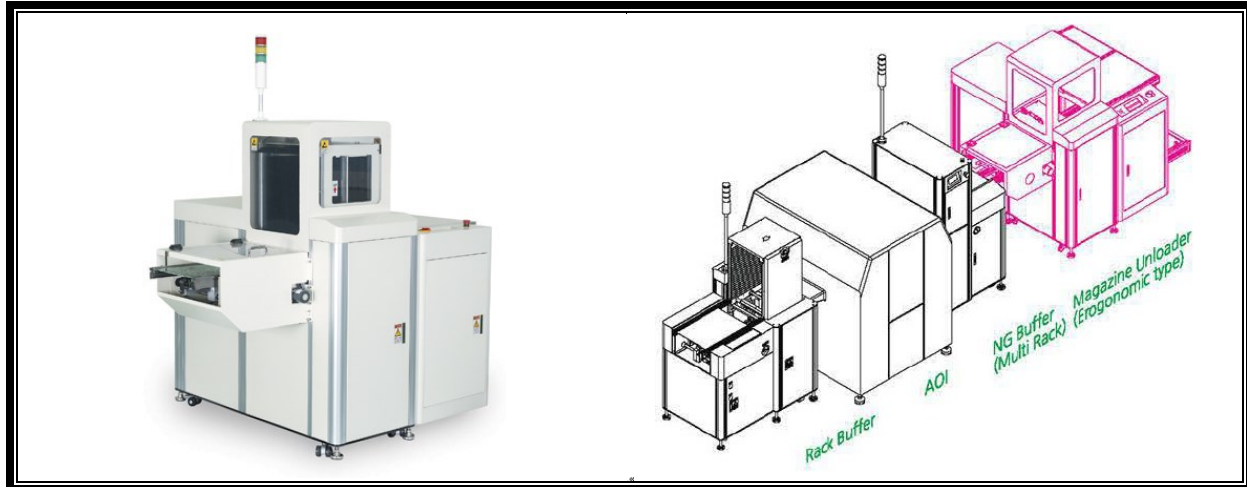


FEATURES

- Lower magazine protects operators from back strain
- SMEMA Interface
- Top & Bottom pneumatic clamps to secure magazine rack
- 3-color LED light tower
- Buzzer
- Pneumatic pusher
- Set up pitch (1~4)
- Touchscreen
- Magazine-in from front; Magazine out to rear
- 4 rack magazine capacity (Front - 2 / Rear - 2)
- 3mm edge clearance at conveyor
- Clearance at conveyor (upper – 25mm / lower – 25mm)

OPTIONS

- 2 different magazine sizes
- High speed magazine exchange (23 sec.)
- 6 rack magazine capacity (Front – 3 / Rear – 3)
- PCB damage prevention sensor
- Automatic width adjustment
- Conveyor speed control
- Cooling fan at conveyor
- Safety full cover (lift and conveyor)
- RS-485 communication
- CE

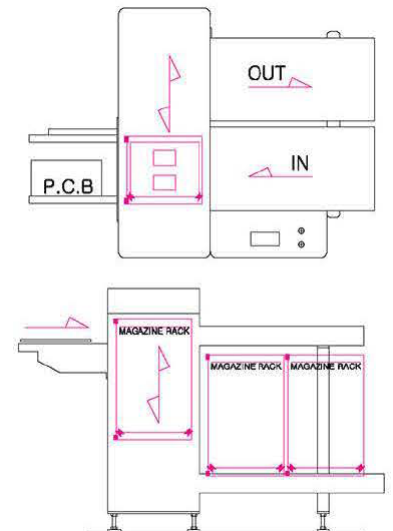

SPECIFICATIONS

Model	Type	Rack	Max. PCB (L x W) mm	Min. PCB (L x W) mm	Dimension (L x W x H)	Power	Air (MPa)	Weight (Kg)
AUD-22SH	S	4	330 x 250	100 x 80	1670 x 1180 x 1570	0.3 kVA	0.5 ± 0.1	250
AUD-22YH	Y		440 x 330		1080 x 1340 x 1570			270

Custom options available by request