


MAGAZINE UNLOADER

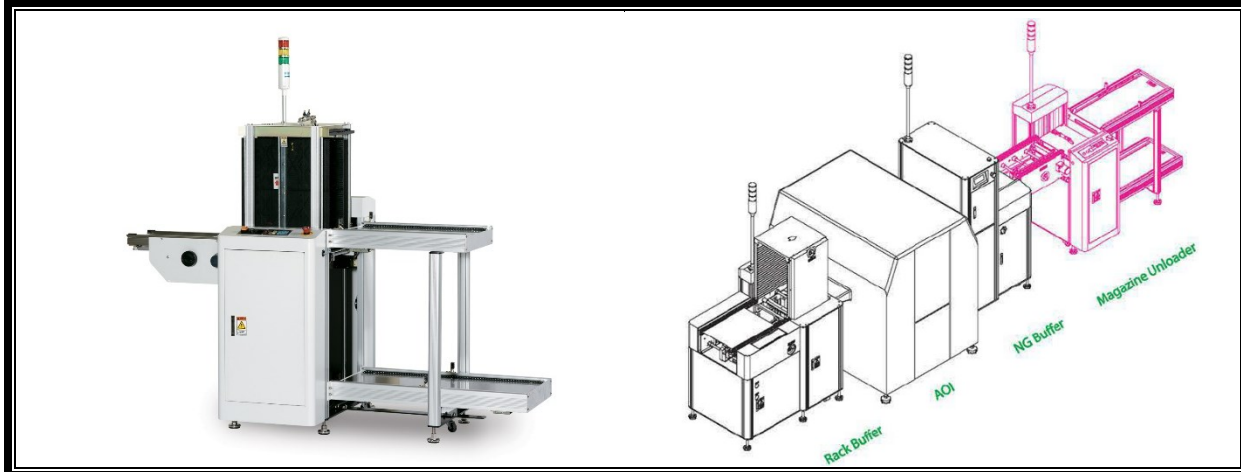


FEATURES

- SMEMA Interface
- Top & Bottom pneumatic clamps to secure magazine rack
- 3-color LED light tower
- Buzzer
- Pneumatic pusher
- Set up pitch (1~4)
- Touchscreen
- Magazine-in from upper; Magazine out to lower
- PCB out from bottom to top
- 3 rack magazine capacity (upper – 1 / lower – 2)
- 3mm edge clearance at conveyor
- Clearance at conveyor (upper – 25mm / low 25mm)

OPTIONS

- 2 different magazine sizes
- Space saver (Type T)
- High speed magazine exchange (23 sec.)
- Auxiliary buffer conveyor
- 5 rack magazine capacity (Upper – 2 / Lower – 3)
- PCB damage prevention sensor
- Automatic width adjustment
- Conveyor speed controller
- Cooling fan at conveyor
- Safety full cover (lift, magazine conveyor and conveyor)
- Dual lane
- RS-485 communication

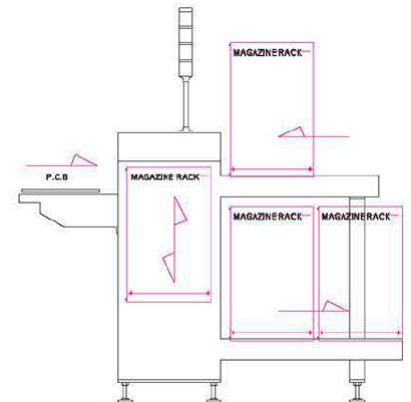

SPECIFICATIONS

| Model | Type | Rack | Max. PCB (L x W) mm | Min. PCB (L x W) mm | Dimension (L x W x H) | Power | Air (MPa) | Weight (Kg) |
|----------|------|------|---------------------|---------------------|-----------------------|---------|-----------|-------------|
| AUD-12S | S | 3 | 330 x 250 | 100 x 80 | 1670 x 810 x 1130 | 0.3 kVA | 0.5 ± 0.1 | 180 |
| AUD-23S | | 5 | | | 2025 x 810 x 1130 | | | 200 |
| AUD-12Y | Y | 3 | 440 x 330 | | 2075 x 925 x 1130 | | | 200 |
| AUD-23Y | | 5 | 2535 x 925 x 1130 | | 220 | | | |
| AUD-12L | L | 3 | 530 x 375 | | 2445 x 985 x 1130 | 0.4kVA | | 230 |
| AUD-23L | | 5 | | | 2480 x 985 x 1130 | | | 240 |
| AUD-12X | XL | 3 | 530 x 460 | | 2445 x 1095 x 1130 | 0.4kVA | | 250 |
| AUD-122X | 2XL | 3 | 610 x 460 | | 2980 x 1095 x 1130 | | | 260 |

Custom options available by request