


OUTFEED CONVEYOR

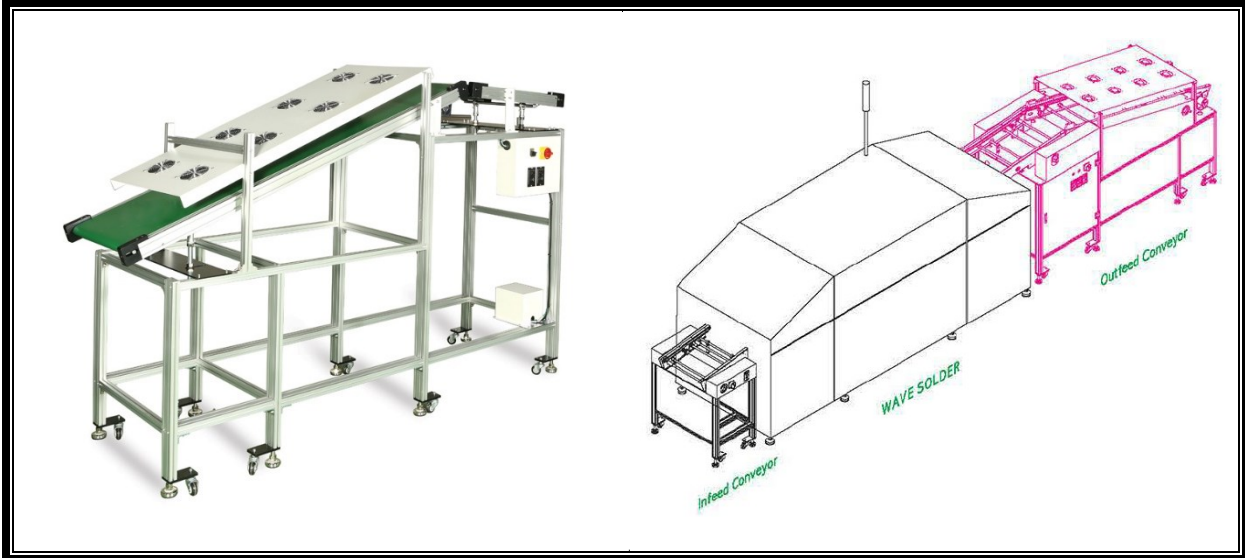


FEATURES

- Always-on driven
- Adjustable angle for conveyor
- Conveyor speed control
- Cooling fan
- Clearance (upper – 25mm / lower – 25mm) at conveyor

OPTIONS

- SMEMA interface
- Conveyor automatic width adjustment
- Touchscreen
- Buzzer
- Covers at lower part
- Selectable rail length
- Selectable belt type (ESD, heat resistant, chain, etc.)
- 3 colored LED light tower
- 06B, pin chain or flat belt

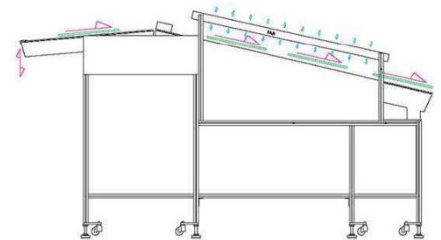

Model	Type	Max. PCB (L x W) mm	Min. PCB (L x W) mm	Dimension (L x W x H)	Power	Weight (Kg)
AOC-300S	S	330 x 250	50 x 50	2720 x 620 x 1500	0.1kVA	170
AOC-300Y	Y	440 x 330		2720 x 700 x 1500		190
AOC-300L	L	530 x 375		2720 x 745 x 1500		210
AOC-300X	XL	530 x 460		2720 x 830 x 1500		230
AOC-3002X	2XL	610 x 460		2727 x 830 x 1500		250

Custom options available by request