

# REJECT CONVEYOR




## FEATURES

- SMEMA Interface
- Durable structure with double base plate
- NG, inspection and pass mode
- Touchscreen
- Up and down system with motor drive
- Buzzer
- 3mm edge clearance at conveyor
- Clearance (upper – 25mm / lower – 25mm) at conveyor

## OPTIONS

- Conveyor automatic width adjustment
- Conveyor speed control
- ESD cover at conveyor
- RS-232C communication with SPI or AOI
- Additional NG loading section
- 3 color LED light tower
- LED light
- Keyboard, mouse and monitor stand
- CE
- RS-485 communication

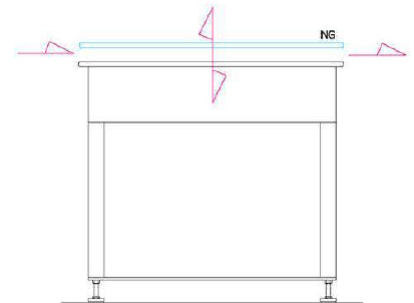

## SPECIFICATIONS

Model	Type	Max. PCB (L x W) mm	Min. PCB (L x W) mm	Dimension (L x W x H)	Power	Air (MPa)	Weight (Kg)
ANRC-100S	S	330 x 250	50 x 50	1000 x 730 x 980	0.3kVA	0.5 ± 0.1	190
ANRC-100Y	Y	440 x 330		1000 x 810 x 980			200
ANRC-100L	L	530 x 375		1000 x 855 x 980			210
ANRC-100X	XL	530 x 460		1000 x 940 x 980			220
ANRC-1002X	2XL	610 x 460		1000 x 940 x 980			230

Custom options available by request