


SINGLE MAGAZINE UNLOADER (CE) TYPE

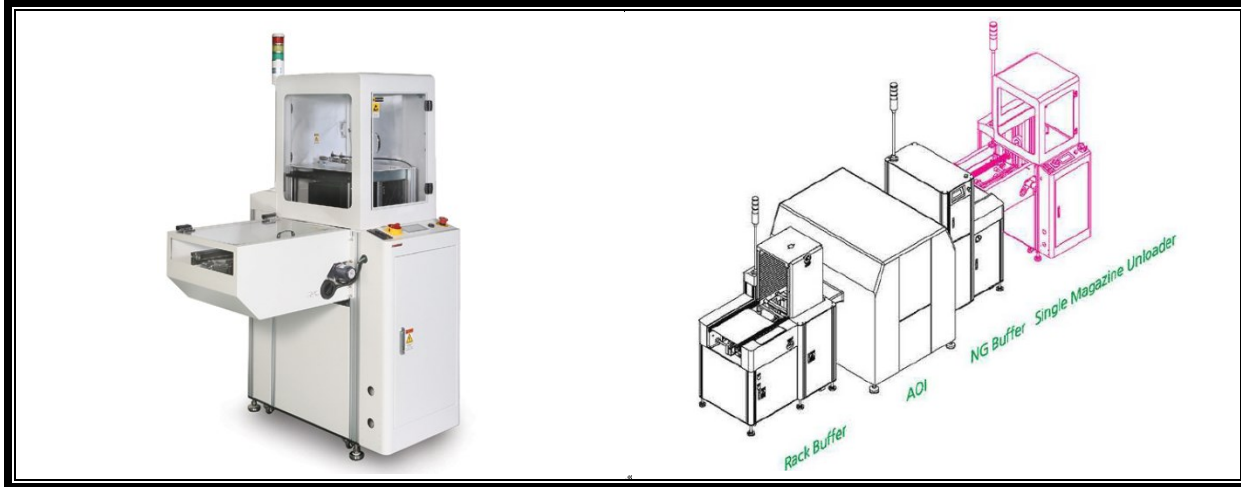


FEATURES

- SMEMA Interface
- Top & Bottom pneumatic clamps to secure magazine rack
- 3-color LED light tower
- Buzzer
- Pneumatic pusher
- Set up pitch (1~4)
- Touchscreen
- Magazine capacity (lift – 1)
- Safety full cover (lift and magazine)
- 3mm edge clearance at conveyor
- Clearance at conveyor (upper – 25mm / lower – 25mm)

OPTIONS

- 2 different magazine sizes
- High speed magazine exchange (23 sec.)
- PCB damage prevention sensor
- Automatic width adjustment
- Conveyor speed controller
- Cooling fan at conveyor
- Dual lane
- RS-485 communication

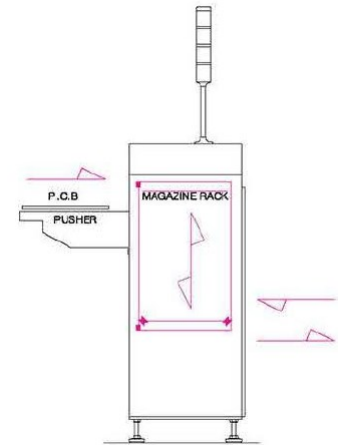

SPECIFICATIONS

| Model | Type | Rack | Max. PCB (L x W) mm | Min. PCB (L x W) mm | Dimension (L x W x H) | Power | Air (MPa) | Weight (Kg) |
|----------|------|------|---------------------|---------------------|-----------------------|---------|--------------|-------------|
| AUD-10CE | S | 3 | 330 x 250 | 100 x 80 | 925 x 810 x 1710 | 0.3 kVA | 0.5 ± 0.1 | 150 |
| | Y | | 440 x 330 | | 1120 x 925 x 1710 | | | 170 |
| | L | | 530 x 375 | | 1325 x 985 x 1710 | | | 190 |
| | XL | | 530 x 460 | | 1325 x 1095 x 1710 | 200 | | |
| | 2XL | | 610 x 460 | | 1410 x 1095 x 1710 | 0.4kVA | | 220 |

Custom options available by request