

SLIDING CONVEYOR (FIXED RAIL CHANGER)




FEATURES

- SMEMA interface
- Touchscreen
- Durable structure with double base plate
- Buzzer
- Timing belt method
- Standard sliding stroke: 200mm
- Safety full cover
- 3mm edge clearance at conveyor
- Clearance (upper – 25mm / lower – 25mm) at conveyor

OPTIONS

- Conveyor automatic width adjustment
- Conveyor speed control
- Pneumatic stopper
- 3 colored LED light tower
- Dual lane
- CE
- RS-485 communication

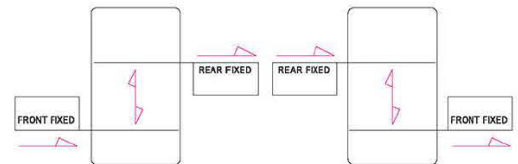

Model	Type	Max. PCB (L x W) mm	Min. PCB (L x W) mm	Dimension (L x W x H)	Power	Weight (Kg)
ASC-50S	S	330 x 250	50 x 50	500 x 810 x 1050	0.3kVA	120
ASC-50Y	Y	440 x 330		500 x 890 x 1050		130
ASC-50L	L	530 x 375		600 x 935 x 1050		140
ASC-50X	XL	530 x 460		700 x 1010 x 1050		150
ASC-502X	2XL	610 x 460		700 x 1010 x 1050		150

Custom options available by request